


銅線用裸圧着端子 丸形端子 〈R形〉

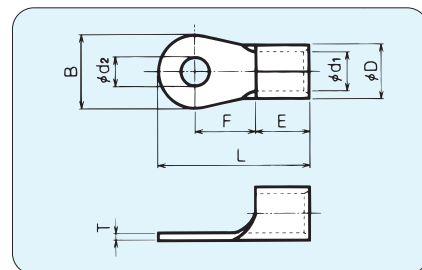

RoHS 2指令対応品

呼　　び				各　部　の　寸　法								適　合　電　線　範　囲			適合工具	一箱入数							
規　格		曲げ		φd ₂	B	L	F	E	φD	φd ₁	T	単線mm	撚線mm ²	MCM									
	UL	CS		R 180-10	10.5	38.0	68.0	22.0	29.0	28.5	21.0	3.5	13.8	152.05	300-350	*12号A *DS-E200M *DS-E250M REC-Li325	10						
	UL	CS		R 180-12	13.0																		
	UL	CS		R 180-14	15.0																		
	UL	CS		R 180-16	17.0																		
	UL	CS	●	R 180-L10	10.5		86.0	38.0					29.0	28.5	21.0			3.5	13.8	152.05	300-350	*12号A *DS-E200M *DS-E250M REC-Li325	10
	UL	CS	●	R 180-L12	13.0																		
	UL	CS	●	R 180-L14	15.0																		
	UL	CS	●	R 180-L16	17.0																		
	UL	CS	●	R 180-20	21.0																		
	UL	CS	●	R 180-24	25.0																		
	UL	CS		R 180-27	28.0																		
	UL	CS		R 200-S10	10.5	44.0	71.0	21.5	32.5	32.7	24.0	4.0	15.6	192.6	400	*12号A *DS-E200M *DS-E250M REC-Li325	8						
	UL	CS		R 200-S12	13.0																		
	UL	CS		R 200-S14	15.0																		
	UL	CS		R 200-S16	17.0																		
	UL		●	R 200-10	10.5		80.0	25.5					32.5	32.7	24.0			4.0	15.6	192.6	400	*12号A *DS-E200M *DS-E250M REC-Li325	8
UL	UL			R 200-12	13.0																		
UL	UL			R 200-14	15.0																		
UL	UL			R 200-16	17.0																		
	UL	CS	●	R 200-L10	10.5		91.5	37.0					32.5	32.7	24.0			4.0	15.6	192.6	400	*12号A *DS-E200M *DS-E250M REC-Li325	8
	UL	CS	●	R 200-L12	13.0																		
	UL	CS	●	R 200-L14	15.0																		
	UL	CS	●	R 200-L16	17.0																		
UL				R 200-18	19.0																		
UL	UL	CS		R 200-20	21.0																		
UL	UL	CS		R 200-24	25.0																		
UL	UL	CS		R 200-27	28.0																		
			●	R 250-12	13.0	44.0	80.0	25.5	32.5	35.6	26.0	4.5	—	250	—	DS-E250M	8						
			●	R 250-14	15.0																		
			●	R 250-16	17.0																		
	UL	CS	●	R 325-10	10.5	50.5	92.0	30.3	36.5	37.6	28.0	4.5	17.5	242.27	500-600	*12号A REC-Li325	6						
	UL	CS	●	R 325-12	13.0																		
	UL	CS	●	R 325-14	15.0																		
UL	UL	CS		R 325-16	17.0																		
	UL	CS	●	R 325-L10	10.5		105.0	43.3					36.5	37.6	28.0			4.5	17.5	242.27	500-600	*12号A REC-Li325	6
	UL	CS	●	R 325-L12	13.0																		
	UL	CS	●	R 325-L14	15.0																		
	UL	CS	●	R 325-L16	17.0																		
UL				R 325-18	19.0																		
UL	UL	CS		R 325-20	21.0																		
UL	UL	CS		R 325-24	25.0																		
UL	UL	CS		R 325-27	28.0																		

1. 各呼びの印は、JIS規格品、UL登録品、CSA登録品です。
 2. CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
 3. 上記寸法表にかぎらず特注品もご相談ください。
 4. *印はUL適合工具です。5. ●・▲印は舌部曲げ加工対象品です。
- (注) 曲げ加工品は各規格に適合していません。曲げ加工品の各寸法は曲げる角度により、異なります。

DAIDO SOLDERLESS TERMINAL MFG.CO.,LTD