
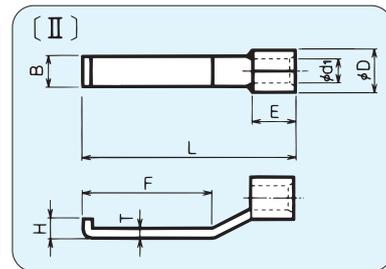


銅線用裸圧着端子 板状形端子 (AP形)

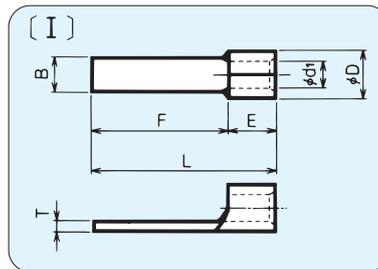


RoHS2指令対応品

規格	曲げ	呼び	タイプ	各部の寸法						適合電線範囲			適合工具	一箱入数																																																																									
				B	L	F	E	φD	φd ₁	T	H	単線mm			撚線mm ²	AWG																																																																							
UL		● AP-0.5	I	1.6	11.0	7.0	4.0	2.3	1.2	0.5	-	0.5-0.8	0.2-0.5	24-20	DS031, DH-1B	1,000 (100×10)																																																																							
		● AP-1.25S		1.0	14.0	9.7	4.3	3.4	1.7	0.8							-	0.57	0.25	22-16	*DS031 *DS-H18 *DH-1B *DS-A5 *DS-Hi34S PALM-125A PALM-12A																																																																		
● AP-1.25N8	1.2	12.3		8.0	4.2	2.3																-	-	1.14	1.04	16-14	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14 *DS-Hi34S PALM-125A PALM-12A																																																												
UL	● AP-1.25M	2.1		17.0																								12.7	8.3	7.1	4.5	1.2	-	2.89~3.65	6.64~10.52	8	*DS-H18, *DS-H214 *DH-1B, *DS-A5 *DS-E14, PALM-125A																																																		
UL	● AP-1.25	3.1		17.0																								12.7										8.3	7.1	4.5	1.2	-	2.89~3.65	6.64~10.52	8	*DS-H18, *DS-H214 *DH-1B, *DS-A5 *DS-E14, PALM-125A																																									
UL	● AP-1.25-9	2.1		13.3																								9.0																			8.3	7.1	4.5	1.2	-	2.89~3.65	6.64~10.52	8	*DS-H18, *DS-H214 *DH-1B, *DS-A5 *DS-E14, PALM-125A																																
UL	● AP-1.25-9B	3.1		13.3																								9.0																												8.3	7.1	4.5	1.2	-	2.89~3.65	6.64~10.52	8	*DS-H18, *DS-H214 *DH-1B, *DS-A5 *DS-E14, PALM-125A																							
UL	● AP-1.25-10	2.1		14.5																								10.2																																					8.3	7.1	4.5	1.2	-	2.89~3.65	6.64~10.52	8	*DS-H18, *DS-H214 *DH-1B, *DS-A5 *DS-E14, PALM-125A														
UL	● AP-1.25L	2.1		21.0																								16.7																																														8.3	7.1	4.5	1.2	-	2.89~3.65	6.64~10.52	8	*DS-H18, *DS-H214 *DH-1B, *DS-A5 *DS-E14, PALM-125A					
UL	● AP-2M	2.1		17.0																								12.7																																																							8.3	7.1	4.5	1.2	-
UL	● AP-2	3.1		17.0							12.7	8.3	7.1	4.5	1.2													-																																																											
UL	● AP-2-9	2.1		13.3			9.0	8.3	7.1	4.5	1.2						-	2.89~3.65	6.64~10.52	8	*DS-H18, *DS-H214 *DH-1B, *DS-A5 *DS-E14, PALM-125A																																																																		
UL	● AP-2-9B	3.1		13.3	9.0	8.3	7.1															4.5	1.2	-	2.89~3.65	6.64~10.52	8																																																												
UL	● AP-2L	2.1		21.0	16.7																								8.3	7.1	4.5	1.2	-	2.89~3.65	6.64~10.52	8	*DS-H18, *DS-H214 *DH-1B, *DS-A5 *DS-E14, PALM-125A																																																		
UL	● AP-2LB	3.2		21.0	16.7																																	8.3	7.1	4.5	1.2	-	2.89~3.65	6.64~10.52	8	*DS-H18, *DS-H214 *DH-1B, *DS-A5 *DS-E14, PALM-125A																																									
UL	● AP-5.5	3.5		20.7	14.4																																										8.3	7.1	4.5	1.2	-	2.89~3.65	6.64~10.52	8	*DS-H18, *DS-H214 *DH-1B, *DS-A5 *DS-E14, PALM-125A																																
UL	● AP-5.5L	3.3		24.5	18.2																																																			8.3	7.1	4.5	1.2	-	2.89~3.65	6.64~10.52	8	*DS-H18, *DS-H214 *DH-1B, *DS-A5 *DS-E14, PALM-125A																							
UL	● AP-5.5B	4.5		19.3	13.0																																																												8.3	7.1	4.5	1.2	-	2.89~3.65	6.64~10.52	8	*DS-H18, *DS-H214 *DH-1B, *DS-A5 *DS-E14, PALM-125A														
UL	● AP-8	4.5		21.3	13.0																																																																					8.3	7.1	4.5	1.2	-	2.89~3.65	6.64~10.52	8	*DS-H18, *DS-H214 *DH-1B, *DS-A5 *DS-E14, PALM-125A					
UL	AP-1.25TU	II		3.0	21.5																																																																														13.2	4.3	3.4	1.7	0.8
UL	AP-2TU		4.2									2.3	0.8	1.8	1.14~1.82	1.04~2.63												16-14																																																									(注2)		

- 各呼びの印は、UL登録品、CSA登録品です。
- CSA登録品としてご使用の際は、注文時にご指示ください。
カートンがCSA品用となります。
- 上記寸法表にかぎりなく特注品もご相談ください。
(注1.) *DS-H12, *DS-H18, *DS031, *DH-1B, *DS-A5, PALM-125 (注2.) *DS-H12, *DS-H18, *DS-H214, *DH-1B, *DS-A5, *DS-E14, PALM-125A
- *印はUL適合工具です。
- ・▲印は舌部曲げ加工対象品です。
(注) 曲げ加工品は各規格に適合していません。曲げ加工品の各寸法は曲げる角度により、異なります。

板状形端子は通常の電流よりも60%~70%位の目安でご使用下さい。

銅線用裸圧着端子 旗形端子 (D形)

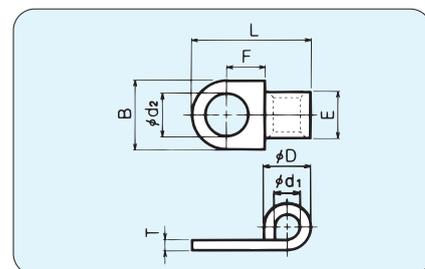

RoHS2指令対応品

呼び	各部の寸法						適合電線範囲			一箱入数		
	φd ₂	B	L	F	E	φD	φd ₁	T	単線mm		撚線mm ²	AWG
D1-3	3.7	6.0	9.4	3.3	4.0	3.4	1.7	0.75	0.57~1.44	0.25~1.65	22-16	1,000 (100×10)
D2-3			10.0			4.0	2.3	0.8	1.14~1.82	1.04~2.63	16-14	