


銅線用絶縁被覆付圧着端子 丸形端子 〈RAV形〉 〈RAA形〉

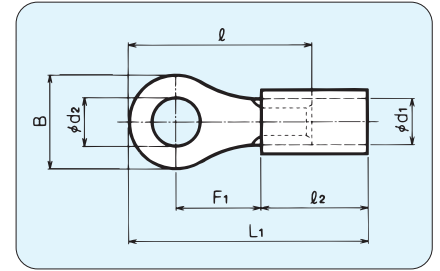

◆ストレート形

RoHS2指令対応品

呼 び			各 部 の 寸 法								標準色	適合電線範囲		適合工具	一箱入数
規 格	ビ ニ ル		φd ₂	B	φd ₁	F ₁	ℓ ₂	ℓ	L ₁	板厚		燃線mm ²	AWG		
		RAV0.08-3	3.2	5.2	2.2	5.9	9.5	12.5	18.0	0.8	黄※	0.08	28	DS05N DH-1B	1,000 (100×10)
		RAV0.08-M3.5	3.7	5.5		7.7		14.5	20.0						
	UL	RAV0.3-2	2.2	5.2	2.2	5.9	9.5	12.5	18.0	0.65	黄※	0.1 ∟ 0.3	26-24	*DS05N *DH-1B *DS-A5	1,000 (100×10)
	UL	RAV0.3-3	3.2												
	UL	RAV0.3-3.5	3.7	6.6		7.7		15.0	20.5						
	UL	RAV0.3-4	4.3												
	UL	RAV0.5-2	2.2	5.2	2.2	5.9	9.5	12.5	18.0	0.5	黄※	0.3 ∟ 0.5	22-20	*DS05N *DH-1B *DS-A5	1,000 (100×10)
	UL	RAV0.5-3	3.2												
	UL	RAV0.5-3.5	3.7	6.6		7.7		15.0	20.5						
	UL	RAV0.5-4	4.3												
	UL	RAV0.5-5	5.3	8.0		7.0									
JIS	UL	RAV1.25-2	2.5	5.5	3.3	4.8	9.5	12.0	17.0	0.8	赤※	0.5 ∟ 1.65	20-16	*DS-Hi3 *DS-Hi34S *DH-1B *DS-A5	500 (100×5)
	UL	RAV1.25-3 (RAA1.25-3)				6.6		13.8	18.8						
	UL	RAV1.25-M3	3.2			7.6		14.9	19.9						
	UL	RAV1.25-N3				6.6		14.4	19.4						
	UL	RAV1.25-V3				8.0		15.5	20.5						
	UL	RAV1.25-L3		7.5		12.0		17.0							
	UL	RAV1.25-S3.5	3.7	5.5		6.6		13.8	18.8						
	UL	RAV1.25-M3.5		7.6		14.9		19.9							
	UL	RAV1.25-N3.5		6.6		14.4		19.4							
	UL	RAV1.25-3.5 (RAA1.25-3.5)	4.3	6.6		14.4		19.4							
	UL	RAV1.25-S4		7.5		15.5		20.5							
	UL	RAV1.25-4 (RAA1.25-4)		10.0		20.2		25.2							
	UL	RAV1.25-5 (RAA1.25-5)	5.3	8.0		21.8		26.8							
	UL	RAV1.25-L5		10.5		29.5		34.5							
	UL	RAV1.25-6		13.0											
	UL	RAV1.25-8													
	UL	RAV1.25-10													
	UL	RAV1.25-A10													
	UL	RAV1.25-12													
UL	RAV2-3	3.2	6.6	3.9	5.2	9.5	13.0	18.0	0.8	青※	1.04 ∟ 2.63	16-14	*DS-Hi4 *DS-Hi34S *DH-1B *DS-A5	500 (100×5)	
UL	RAV2-M3		5.5		6.5		12.4	17.4							
UL	RAV2-L3	3.7	5.8		5.2		13.7	18.7							
UL	RAV2-M3.5		6.6		8.3		13.9	18.9							
UL	RAV2-3.5 (RAA2-3.5)		6.5		16.0		21.0								
UL	RAV2-L3.5	4.3	6.6		7.8		14.3	19.3							
UL	RAV2-M4		8.3		16.0		21.0								
UL	RAV2-S4		16.5		21.5										
UL	RAV2-4 (RAA2-4)	5.3	8.5		17.0		22.0								
UL	RAV2-S5		9.5		21.5		26.5								
UL	RAV2-5 (RAA2-5)		11.0		27.5		32.5								
UL	RAV2-L5	6.4	12.0		14.0		28.5	33.5							
UL	RAV2-6 (RAA2-6)		18.0		24.0		29.0								
UL	RAV2-8 (RAA2-8)		16.0		32.5		37.5								
UL	RAV2-A8	8.4	14.5		13.9		26.9	31.9							
UL	RAV2-B8		20.0		29.5		34.5								
UL	RAV2-10		10.5		18.0		14.0	27.5						32.5	
UL	RAV2-A10	10.5	20.0		18.0		32.5	37.5							
UL	RAV2-B10		17.0		26.9		31.9								
UL	RAV2-12		13.0	22.0	29.5	34.5									
UL	RAV2-A12														

- 各呼びの印は、JIS規格品、UL登録品、CSA登録品です。()はJIS規格品の呼びを示します。
- CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
- 上記寸法表にかぎらず特注品もご相談ください。
- *印はUL適合工具です。

※…表の絶縁被覆のカラーは、あくまで標準色です。ご用意できるカラーはP.20をご参照下さい。