


銅線用絶縁被覆付圧着端子 丸形端子 〈R B V形〉 〈R B A形〉

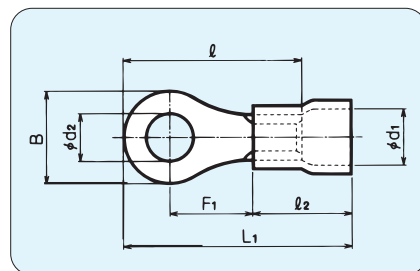

◆拡管形

RoHS2指令対応品

呼　　び				各　部　の　寸　法							標準色	適合電線範囲		適合工具	一箱入数			
規　格		ビ　ニ　ル		φ d ₂	B	φ d ₁	F ₁	ℓ ₂	ℓ	L ₁		板厚	撚線mm ²			AWG		
	UL		RBV3.5-S4	4.3	7.0	6.0	8.3	13.5	17.1	25.3	1.0	黄※	2.63	12	*DS-Hi5 *DH-1B *DS-A5	300 (100×3)		
	UL	SE	RBV3.5-4		8.5					17.8							26.0	
	UL	SE	RBV3.5-5	5.3														
	UL	SE	RBV3.5-6	6.4	12.0		10.5		21.8	30.0			4.6					
	UL	SE	RBV3.5-8	8.4	14.5		12.5		25.0	33.2								
	UL	SE	RBV3.5-10	10.5														
	UL		RBV3.5-12	13.0	20.0		15.7		31.0	39.2						200 (100×2)		
	UL	SE	RBV5.5-V3	3.2	7.2	6.4	5.9	13.5	15.8	23.0	1.0	黄※	2.63	12-10	*DS-Hi5 *DH-1B *DS-A5	300 (100×3)		
	UL	SE	RBV5.5-M3		7.1		8.5		18.3	25.5								
	UL	SE	RBV5.5-V3.5	7.2	5.9		15.8		23.0									
	UL	SE	RBV5.5-3.5		3.7	7.7	7.2	17.3	24.5									
	UL	SE	RBV5.5-M3.5	7.1	8.5	18.3	25.5											
	UL	SE	RBV5.5-V4	4.3	7.2	5.9	15.8	23.0										
	UL	SE	RBV5.5-S4		7.7	7.2	17.3	24.5										
			RBV5.5-N4	4.4	8.0	8.5		18.8	26.0			2.63	12-10	*DS-Hi5 *DH-1B *DS-A5				
	UL	SE	RBV5.5-M4	4.3	7.1		18.3	25.5										
JIS	UL	SE	RBV5.5-4 (RBA5.5-4)		9.5		19.5	26.7										
	UL	SE	RBV5.5-S5	5.3	8.0		18.8	26.0										
JIS	UL	SE	RBV5.5-5 (RBA5.5-5)		9.5		19.5	26.7										
	UL		RBV5.5-L5	12.0	10.2	22.5	29.7	6.64										
	UL		RBV5.5-S6		9.5	8.5	19.5		26.7									
JIS	UL	SE	RBV5.5-6 (RBA5.5-6)	6.4		12.0	10.2		22.5	29.7								
	UL		RBV5.5-L6		14.0	14.0	26.3	33.5	200 (100×2)									
	UL		RBV5.5-A6			16.0	16.0	29.8		37.0								
JIS	UL	SE	RBV5.5-8 (RBA5.5-8)	8.4	15.0		14.0	27.3		34.5								
JIS	UL	SE	RBV5.5-10 (RBA5.5-10)	10.5		32.0		39.2										
	UL		RBV5.5-12	13.0	20.0	15.7												
	UL		RBV5.5-14	15.0	32.0	25.7	48.0	55.2										
	UL		RBV5.5-16	17.0														
	UL		RBV5.5-20	21.0														

1. 各呼びの印は、JIS規格品、UL登録品、CSA登録品です。()はJIS規格品の呼びを示します。
 2. CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
 3. 上記寸法表にがざらず特注品もご相談ください。
 4. *印はUL適合工具です。
- ※…表の絶縁被覆のカラーは、あくまで標準色です。ご用意できるカラーはP.20をご参照下さい。