


# 銅線用裸圧着端子 丸形端子 (R形)

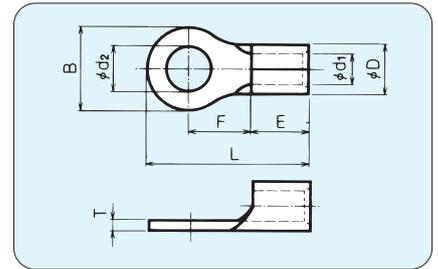

RoHS2指令対応品

規格	曲げ	呼び	各部の寸法							適合電線範囲			適合工具	一箱入数																																																				
			φd <sub>2</sub>	B	L	F	E	φD	φd <sub>1</sub>	T	単線mm	撚線mm <sup>2</sup>			AWG																																																			
UL	CF	● R5.5-V3	3.2	7.2	15.8	5.9	6.3	5.6	3.4	1.0	1.82	2.63	12-10	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14 PALM-125A	500 (100×5)																																																			
UL	CF	● R5.5-M3		7.1	18.3	8.5																																																												
UL	CF	● R5.5-V3.5	3.7	7.2	15.8	5.9																																																												
UL	CF	● R5.5-3.5		7.7	17.3	7.2																																																												
UL	CF	● R5.5-M3.5	7.1	18.3	8.5																																																													
UL	CF	● R5.5-V4	4.3	7.2	15.8	5.9																																																												
UL	CF	● R5.5-S4		7.7	17.3	7.2																																																												
UL	CF	● R5.5-N4	8.0	18.8	8.5																																																													
UL	CF	● R5.5-M4	7.1	18.3																																																														
UL	CF	● R5.5-4	5.3	9.5	19.5	6.3										5.6	3.4	1.0	1.82	2.63	12-10	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14 PALM-125A	500 (100×5)																																											
UL	CF	● R5.5-S5		8.0	18.8																																																													
UL	CF	● R5.5-5	9.5	19.5	10.2																																																													
UL	CF	● R5.5-L5	12.0	22.5																																																														
UL	CF	● R5.5-S6	6.4	9.5	19.5						6.3	5.6	3.4	1.0	2.89									6.64	12-10	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14 PALM-125A	500 (100×5)																																							
UL	CF	● R5.5-6		12.0	22.5																																																													
UL	CF	● R5.5-L6	6.4	12.0	26.3																							6.3	5.6	3.4	1.0	2.89	6.64	12-10	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14 PALM-125A	500 (100×5)																														
UL	CF	● R5.5-A6			29.8																																16.0																													
UL	CF	● R5.5-8	8.4	15.0	14.0																																																													
UL	CF	● R5.5-10	10.5	27.3																																																														
UL	CF	● R5.5-12	13.0	20.0	32.0														6.3	5.6	3.4	1.0	2.89														6.64	12-10	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14 PALM-125A	500 (100×5)																										
UL	CF	● R5.5-14	15.0	25.7																																																														
UL	CF	● R5.5-16	17.0		32.0		48.0	6.3	5.6	3.4																															1.0	2.89	6.64	12-10	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14 PALM-125A	500 (100×5)																				
UL	CF	● R5.5-20	21.0	25.7																																																														
UL	CF	● R8-V4	4.3		9.0		22.1								6.3									5.6	3.4	1.0	2.89																				6.64	8	*DS-H18 *DS-H214 *DS-E14	400 (100×4)																
UL	CF	● R8-S4		21.3	9.3																																																													
UL	CF	● R8-4	5.3	10.0	21.8		6.3																									5.6	3.4	1.0	2.89	6.64															8	*DS-H18 *DS-H214 *DS-E14	400 (100×4)													
UL	CF	● R8-V5		22.1	9.3																																																													
UL	CF	● R8-V5L	5.3	9.0	26.6																																																	6.3	5.6	3.4	1.0	2.89	6.64	8	*DS-H18 *DS-H214 *DS-E14	400 (100×4)				
UL	CF	● R8-SS5		21.3	8.5																																																													
UL	CF	● R8-S5	6.4	10.0	21.8	6.3										5.6	3.4	1.0					3.65														10.52	8	*DS-H18 *DS-H214 *DS-E14	400 (100×4)																										
UL	CF	● R8-5		12.0	23.5																																																													
UL	CF	● R8-S6	6.4	10.0	21.8																																					6.3	5.6	3.4	1.0	3.65																	10.52	8	*DS-H18 *DS-H214 *DS-E14	400 (100×4)
UL	CF	● R8-6		12.0	23.5																																																													
UL	CF	● R8-A6	8.4	15.0	31.8						6.3	5.6	3.4	1.0													3.65																				10.52	8	*DS-H18 *DS-H214 *DS-E14	400 (100×4)																
UL	CF	● R8-8			29.5																																																													
UL	CF	● R8-10	10.5	29.5	14.0																																																													
UL	CF	● R8-12	13.0	20.0																								6.3	5.6	3.4	1.0				3.65	10.52															8	*DS-H18 *DS-H214 *DS-E14	400 (100×4)													
UL	CF	● R8-14	15.0	50.0																																																														
UL	CF	● R8-16	17.0		32.0																																																					50.0	6.3	5.6	3.4	1.0				
UL	CF	● R8-20	21.0	25.7																																																														
UL	CF	▲ R14-S4	4.3		10.0														28.5	6.3	5.6	3.4	1.0														3.65	10.52	6	*DS-H214 *DS-HO60 *DS-HO150 *DS-E14 *DS-E60 *DS-E150 *DS-E200M *DS-E250M																		200 (100×2)								
UL	CF	▲ R14-SS5		9.0	28.0																																																													
UL	CF	▲ R14-S5	5.3	10.0	28.5			6.3	5.6	3.4									1.0																						3.65					10.52																	6	*DS-H214 *DS-HO60 *DS-HO150 *DS-E14 *DS-E60 *DS-E150 *DS-E200M *DS-E250M	200 (100×2)	
UL	CF	▲ R14-5		12.0	29.5																																																													
UL	CF	▲ R14-S6	6.4	10.0	28.5										6.3									5.6	3.4	1.0	3.65																				10.52	6	*DS-H214 *DS-HO60 *DS-HO150 *DS-E14 *DS-E60 *DS-E150 *DS-E200M *DS-E250M	200 (100×2)																
UL	CF	▲ R14-6		12.0	29.5																																																													
UL	CF	▲ R14-S8	8.4	12.0	29.5		6.3																									5.6	3.4	1.0	3.65	10.52															6	*DS-H214 *DS-HO60 *DS-HO150 *DS-E14 *DS-E60 *DS-E150 *DS-E200M *DS-E250M	200 (100×2)													
UL	CF	▲ R14-8																																																				16.0	32.5	15.0										
UL	CF	▲ R14-10	10.5	22.0	40.6																																																				6.3									5.6
UL	CF	▲ R14-12	13.0	22.0	40.6																																																													
UL	CF	▲ R14-14	15.0	30.0	49.0	6.3										5.6	3.4	1.0																			3.65	10.52	6	*DS-H214 *DS-HO60 *DS-HO150 *DS-E14 *DS-E60 *DS-E150 *DS-E200M *DS-E250M														200 (100×2)												
UL	CF	▲ R14-16																																								17.0	24.0																							
UL	CF	▲ R14-20	21.0	24.0																																																														

- 各呼びの印は、JIS規格品、UL登録品、CSA登録品です。
- CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
- 上記寸法表にかぎらず特注品もご相談ください。
- \*印はUL適合工具です。

- ・▲印は舌部曲げ加工対象品です。
- ▲印はご注文前に弊社または弊社営業所まで必ずお問合せ下さい。  
(注)曲げ加工品は各規格に適合していません。曲げ加工品の各寸法は曲げる角度により、異なります。