


銅線用裸圧着端子 丸形端子 (R形)

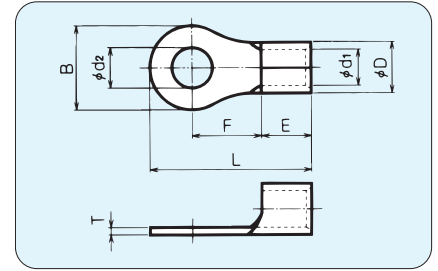

RoHS 2指令対応品

規格			曲げ	呼　　び	各　部　の　寸　法							適　合　電　線　範　囲			適合工具	一箱入数								
					φ d ₂	B	L	F	E	φ D	φ d ₁	T	単線mm	撚線mm ²			AWG							
	UL	CF	▲	R 22-S5	5.3	12.0	32.2	14.8	11.4	11.5	7.7	1.8	4.62	16.78	4	*DS-HO60 *DS-HO150 *DS-E60 *DS-E150 *DS-E200M *DS-E250M REC-Li325	100							
	UL	CF	▲	R 22-S6	6.4																			
	UL	CF	▲	R 22-S8	8.4																			
	UL	CF		R 22-S 10	10.5	16.5	33.4	13.8										5.81	26.66					
	UL	CF	▲	R 22-5	5.3																			
JIS	UL	CF		R 22-6	6.4																			
JIS	UL	CF		R 22-8	8.4																			
JIS	UL	CF		R 22-10	10.5																			
JIS	UL	CF		R 22-12	13.0	22.0	37.0	16.9																
	UL	CF	▲	R 22-14	15.0																			
	UL	CF	▲	R 22-16	17.0																			
	UL	CF	▲	R 22-20	21.0	30.0	51.0	24.6																50
	UL	CF	●	R 38-S5	5.3	16.0	38.0	17.0	13.0	13.3	9.4	1.8	5.81	26.66	2	*DS-HO60 *DS-HO150 *DS-E60 *DS-E150 *DS-E200M *DS-E250M REC-Li325	100							
	UL	CF	●	R 38-S6	6.4																			
	UL	CF	●	R 38-S8	8.4																			
	UL	CF	●	R 38-S 10	10.5	22.0	42.0	18.0										13.0	13.3	9.4	1.8	7.34	42.42	
	UL	CF	●	R 38-5	5.3																			
	UL	CF	●	R 38-6	6.4																			
JIS	UL	CF		R 38-8	8.4																			
JIS	UL	CF		R 38-10	10.5																			
JIS	UL	CF		R 38-12	13.0	30.0	51.0	23.0																
	UL	CF	●	R 38-14	15.0																			
	UL	CF	●	R 38-16	17.0																			
	UL	CF	●	R 38-18	19.0																			
	UL	CF	●	R 38-20	21.0																			
			●	R 60-S6	6.4	16.0	45.0	18.0	18.0	15.5	11.4	2.0	7.34	42.42	1／0	*DS-HO60 *DS-HO150 *12号A *DS-E60 *DS-E150 *DS-E200M *DS-E250M REC-Li325	50							
	UL		●	R 60-S8	8.4																			
			●	R 60-S 10	10.5													22.0	48.0	19.0				
	UL	CF	●	R 60-6	6.4																			
JIS	UL	CF		R 60-8	8.4																			
JIS	UL	CF		R 60-10	10.5																			
JIS	UL	CF		R 60-12	13.0	32.0	66.5	32.5																
			●	R 60-10L	10.5																			
			●	R 60-12L	13.0																			
JIS	UL	CF		R 60-14	15.0																			
	UL	CF	●	R 60-16	17.0								57.0	23.0										
			●	R 60-18	19.0																			
	UL	CF		R 60-20	21.0																			
	UL	CF	●	R 60-24	25.0																			
	UL	CF	●	R 70-6	6.4	24.0	51.0	20.5	18.5	17.5	13.5	2.0			8.26	60.57	2／0	*DS-HO150 *DS-E150 *DS-E200M *DS-E250M REC-Li325	50					
	UL	CF	●	R 70-8	8.4																			
	UL	CF	●	R 70-10	10.5								32.0	65.0						30.5				
	UL	CF	●	R 70-12	13.0																			
	UL	CF	●	R 70-14	15.0																			
	UL	CF	●	R 70-16	17.0																			
	UL	CF	●	R 70-20	21.0																			
	UL	CF	●	R 70-24	25.0																			

1. 各呼びの印は、JIS規格品、UL登録品、CSA登録品です。
2. CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
3. 上記寸法表にかぎらず特注品もご相談ください。
4. *印はUL適合工具です。

5. ●・▲印は舌部曲げ加工対象品です。
6. ▲印はご注文前に弊社または弊社営業所まで必ずお問合せ下さい。
(注) 曲げ加工品は各規格に適合していません。曲げ加工品の各寸法は曲げる角度により、異なります。