


■銅線用裸圧着スリーブ

(直線突き合わせ用B型・直線重ね合わせ用P型)

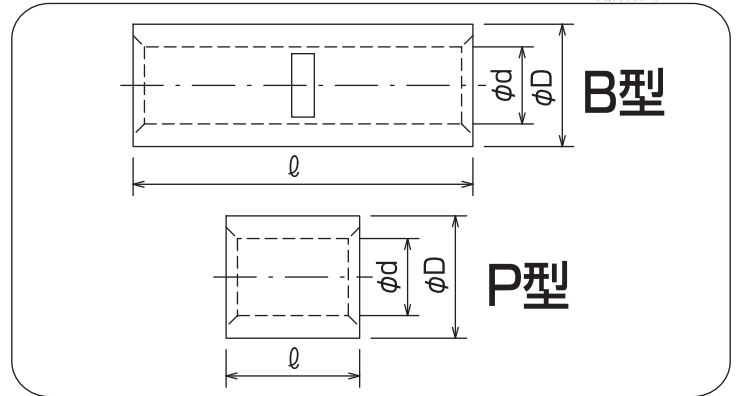

RoHSII P.1をご覧ください。

単位:mm

| 呼び | l | φD | φd | 電線抱合容量(参考) | | 適合工具 | | | 一箱入数 | | |
|-------|--------|----|------|-------------------|--------------|------------|-----------------------------------|-------------------------------|------|-------------------|-------------------|
| | | | | 撚線mm ² | AWG・MCM | | | | | | |
| B | B-1.25 | 15 | 3.3 | 1.7 | 0.25~1.65 | 22-16 | 214A | ミニ12 | 5N18 | AC-5ND (1号ヘッド) | 1,000 (100×10) |
| | B-2 | | 4.0 | 2.3 | 1.04~2.63 | 16-14 | | | | | |
| | B-5.5 | | 5.4 | 3.4 | 2.63~6.64 | 12-10 | | | | | |
| | B-8 | 21 | 7.0 | 4.5 | 6.64~10.52 | 8 | EP-150A REC-Li150 REC-Li200 | 9H-60 EP-1460 REC-Li60S | 12号A | 100 | |
| | B-14 | 26 | 8.9 | 5.8 | 10.52~16.78 | 6 | | | | | |
| | B-22 | 29 | 11.3 | 7.7 | 16.78~26.66 | 4 | | | | | |
| | B-38 | 32 | 13.2 | 9.4 | 26.66~42.42 | 2 | EP-150A REC-Li150 REC-Li200 | 9H-60 EP-1460 REC-Li60S | 12号A | 50 | |
| | B-60 | 36 | 15.4 | 11.4 | 42.42~60.57 | 1/0 | | | | | |
| | B-70 | 37 | 17.5 | 13.3 | 60.57~76.28 | 2/0 | | | | | |
| | B-80 | 38 | 19.4 | 14.5 | 76.28~96.3 | 3/0 | EP-150A REC-Li150 REC-Li200 | 9H-60 EP-1460 REC-Li60S | 12号A | 20 | |
| | B-100 | | 22 | 16.4 | 96.3~117.2 | 4/0 | | | | | |
| | B-150 | 54 | 26.4 | 19.5 | 117.2~152.05 | 250-300MCM | EP-150A REC-Li150 REC-Li200 | 9H-60 EP-1460 REC-Li60S | 12号A | 10 | |
| | B-180 | 57 | 28.5 | 21 | 152.05~192.6 | 350MCM | | | | | |
| | B-200 | 63 | 32.2 | 24 | 192.6~242.27 | 400MCM | REC-Li200 | REC-Li325 | | | |
| B-250 | 72 | 35 | 26.5 | 250 | 500MCM | REC-Li250M | | | | | |
| B-325 | 72 | 37 | 28 | 242.27~325.0 | 500-600MCM | | REC-Li325 | 12号A | | | |

RoHSII P.1をご覧ください。

単位:mm

| 呼び | l | φD | φd | 電線抱合容量(参考) | | 適合工具 | | | 一箱入数 | | |
|-------|--------|------|------|-------------------|--------------|------------|-----------------------------------|-------------------------------|------|-------------------|-------------------|
| | | | | 撚線mm ² | AWG・MCM | | | | | | |
| P | P-1.25 | 8.0 | 3.3 | 1.7 | 0.25~1.65 | 22-16 | 214A | ミニ12 | 5N18 | AC-5ND (1号ヘッド) | 1,000 (100×10) |
| | P-2 | | 4.0 | 2.3 | 1.04~2.63 | 16-14 | | | | | |
| | P-5.5 | | 8.5 | 5.4 | 3.4 | 2.63~6.64 | | | | | |
| | P-8 | 9.5 | 7.0 | 4.5 | 6.64~10.52 | 8 | EP-150A REC-Li150 REC-Li200 | 9H-60 EP-1460 REC-Li60S | 12号A | 500 (100×5) | |
| | P-14 | 11.0 | 8.9 | 5.8 | 10.52~16.78 | 6 | | | | | |
| | P-22 | 13.5 | 11.3 | 7.7 | 16.78~26.66 | 4 | | | | | |
| | P-38 | 16.5 | 13.2 | 9.4 | 26.66~42.42 | 2 | EP-150A REC-Li150 REC-Li200 | 9H-60 EP-1460 REC-Li60S | 12号A | 100 | |
| | P-60 | 19.0 | 15.4 | 11.4 | 42.42~60.57 | 1/0 | | | | | |
| | P-70 | | 17.5 | 13.3 | 60.57~76.28 | 2/0 | | | | | |
| | P-80 | 19.5 | 19.4 | 14.5 | 76.28~96.3 | 3/0 | EP-150A REC-Li150 REC-Li200 | 9H-60 EP-1460 REC-Li60S | 12号A | 50 | |
| | P-100 | 20 | 22 | 16.4 | 96.3~117.2 | 4/0 | | | | | |
| | P-150 | 27 | 26.4 | 19.5 | 117.2~152.05 | 250-300MCM | EP-150A REC-Li150 REC-Li200 | 9H-60 EP-1460 REC-Li60S | 12号A | 40 | |
| | P-180 | 28.5 | 28.5 | 21 | 152.05~192.6 | 350MCM | | | | | |
| | P-200 | 32 | 32.2 | 24 | 192.6~242.27 | 400MCM | REC-Li200 | REC-Li325 | | | |
| P-325 | 37 | 37 | 28 | 242.27~325.0 | 500-600MCM | | | | | | |

(注意) ・各部の寸法は予告なく変更することがあります。
・太字は、JIS規格品です。

・斜体はUL登録工具です。詳しくはパッケージの説明書をご覧ください。
・P型の電線抱合容量は、合計断面積を示します。