


# T形コネクタ

■ 各種機械廻りや、分電盤、配電盤など中間分岐が必要な箇所にご使用いただけます。

■ 梱包数単位での販売となります。

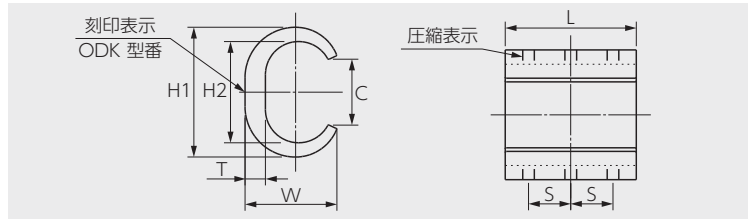

品番	T形コネクタ 寸法(mm)						包装数
	H1	H2	W	L	T	C	
T-44	19.2	13.4	13.8	20.3	4.1	8.8	100
T-60	21.2	15.2	15.1	22.3	4.2	9.9	80
T-76	24.5	17.3	17.7	22.2	5.1	10.9	50
T-98	27.7	20.2	19.3	25.3	5.1	12.8	50
T-122	29.9	22.1	21.5	26.2	5.5	13.7	50
T-154	34.1	25.5	24.4	28.4	6.1	16.8	40
T-190	37.0	28.5	25.6	34.9	6.1	17.5	20
T-240	40.1	30.3	29.0	40.1	7.1	19.0	15
T-288	44.5	34.7	31.5	45.2	7.1	22.3	10
T-365	47.5	37.8	33.8	50.4	7.1	25.0	10

品番	圧縮回数と位置		適用電線		適用工具			
	回数	S	合計断面積(mm <sup>2</sup> )		15号B	16号B	EP365	EP520C
T-44	1	—	27~44		●	●	●	
T-60	2	11	45~60		●	●	●	
T-76	2	11	61~76		●	●	●	
T-98	2	11	77~98		●	●	●	
T-122	2	12	99~122		●	●	●	●
T-154	3	8.5	123~154			●	●	●
T-190	3	10.5	155~190			●	●	●
T-240	3	13	191~240			●	●	●
T-288	3	14.5	241~288			●	●	●
T-365	3	16	289~365			●	●	●

本線(mm <sup>2</sup> )	分岐線側(mm <sup>2</sup> )												
	2 (Φ1.6)	3.5 (Φ2.0)	5.5 (Φ2.6)	8	14	22	38	60	80	100	125	150	
14					44								
22			44	44	44	44							
30	44	44	44	44	44	60							
38	44	44	44	60	60	60	76						
50	60	60	60	60	76	76	98						
60	76	76	76	76	76	98	98	122					
80	98	98	98	98	98	122	122	154	190				
100	122	122	122	122	122	122	154	190	190	240			
125	154	154	154	154	154	154	190	190	240	240	288		
150	154	154	190	190	190	190	190	240	240	288	288	365	
200	240	240	240	240	240	240	240	288	288	365	365	365	
250			288	288	288	288	288	365	365	365			
325			365	365	365	365	365						